




Gew. 13-8-36

Anteurecht volgens de Wet omtrent de Rechten van Auteurs.

Schakelaars in U.K.A.-stand getekend.

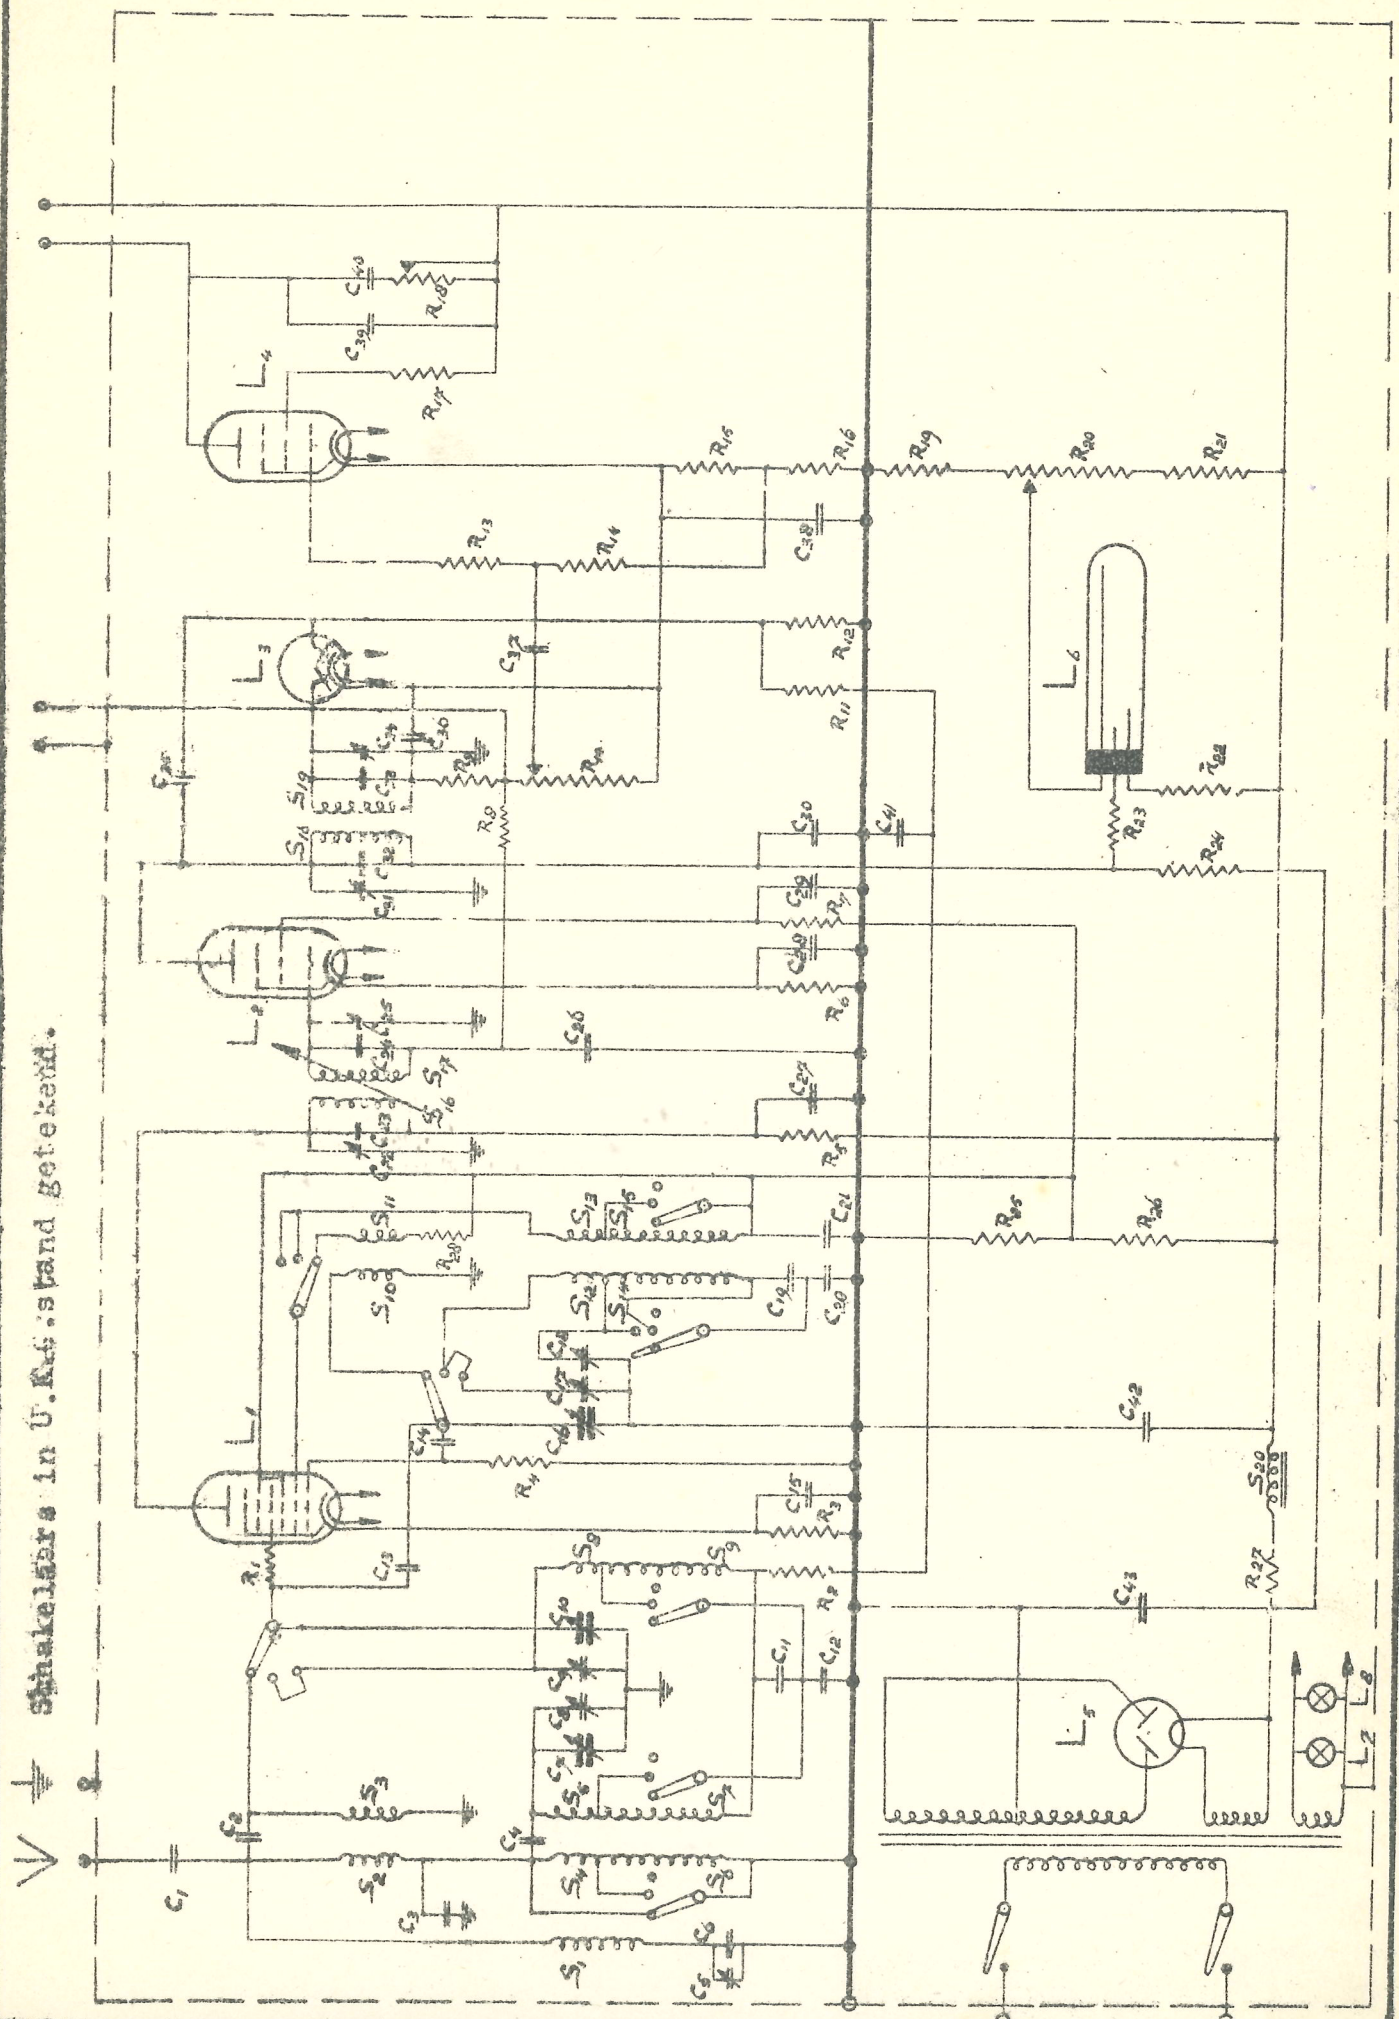



Gew. 16-10.36

Auteursrecht volgens de wet voorbehouden.

Condensatoren		
C	Capaciteit	Codenummer
1	10000 µF	28 193 900
2	10 "	28 190 030
3	80 "	28 192 990
4	10 "	
5	27 "	28 210 690
6	80 "	
7	490 "	28 211 421
8	27 "	
9	27 "	
10	490 "	
11	50000 "	28 199 060
12	25000 "	030
13	2 "	28 205 800
14	500 "	28 190 200
15	50000 "	
16	490 "	
17	27 "	
18	27 "	
19	1000 "	28 193 000
20	2010 "	010
21	50000 "	
22	27 "	
23	80 "	
24	80 "	
25	27 "	
26	50000 "	
27	50000 "	
28	0,1 µF	28 199 090
29	0,1 "	
30	50000 µF	
31	27 "	
32	80 "	
33	80 "	
34	27 "	
35	10 "	
36	100 "	28 190 130
37	10000 "	
38	25 "	
39	2000 "	28 193 920
40	10000 "	
41	50000 "	
42	16 "	
43	16 "	
44		

Weerstanden		
R	Weerstand	Codenummer
1	20 Ω	GK 770 41
2	0,2 MΩ	28 770 480
3	250 Ω	190
4	50000 "	420
5	10000 "	350
6	2000 "	280
7	1000 "	250
8	2 MΩ	580
9	0,1 "	
10	0,5 "	pot. meter 10g.
11	1 "	28 770 530
12	0,5 "	
13	0,1 "	
14	1,6 "	
15	160 Ω	28 770 170
16	160 "	
17	32 "	100
18	50000 "	pot. meter
19	20000 "	28 770 380
20	20000 "	pot. meter
21	80000 "	1 Watt
22	2 MΩ	28 770 560
23	1000 Ω	
24	32000 "	28 771 090 1 W
25	2x50000 "	0,0 1 W
26	3x50000 "	0,0 1 W
27	5x 5000 "	28 770 970 1 W
28	100 "	28 770 150 0,5 W

Spoolen.		
S	windingen	Codenummer
1	930	GK 561 05
2	30) GK 561 08
3	10,5	
4	170) GK 561 02
5	180	
6	550) GK 561 03
7	350	
8	176) GK 561 09
9	350	
10	13) GK 561 04
11	6	
12	84) GK 561 06
13	20	
14	244) GK 561 07
15	84	
16	1070) GK 561 08
17	1070	
18	1070) GK 561 09
19	1050	
20	3000	28 546 081

LAMPEN.	
L	
1	= AK 2
2	= AF 3
3	= AB 2
4	= AL 4
5	= AS 1

Transformator GK 510 29