




gew. 12-8-1936

Auteursrecht volgens de wet voorbehouden.

schakelaars in stand I (13-38 M.)

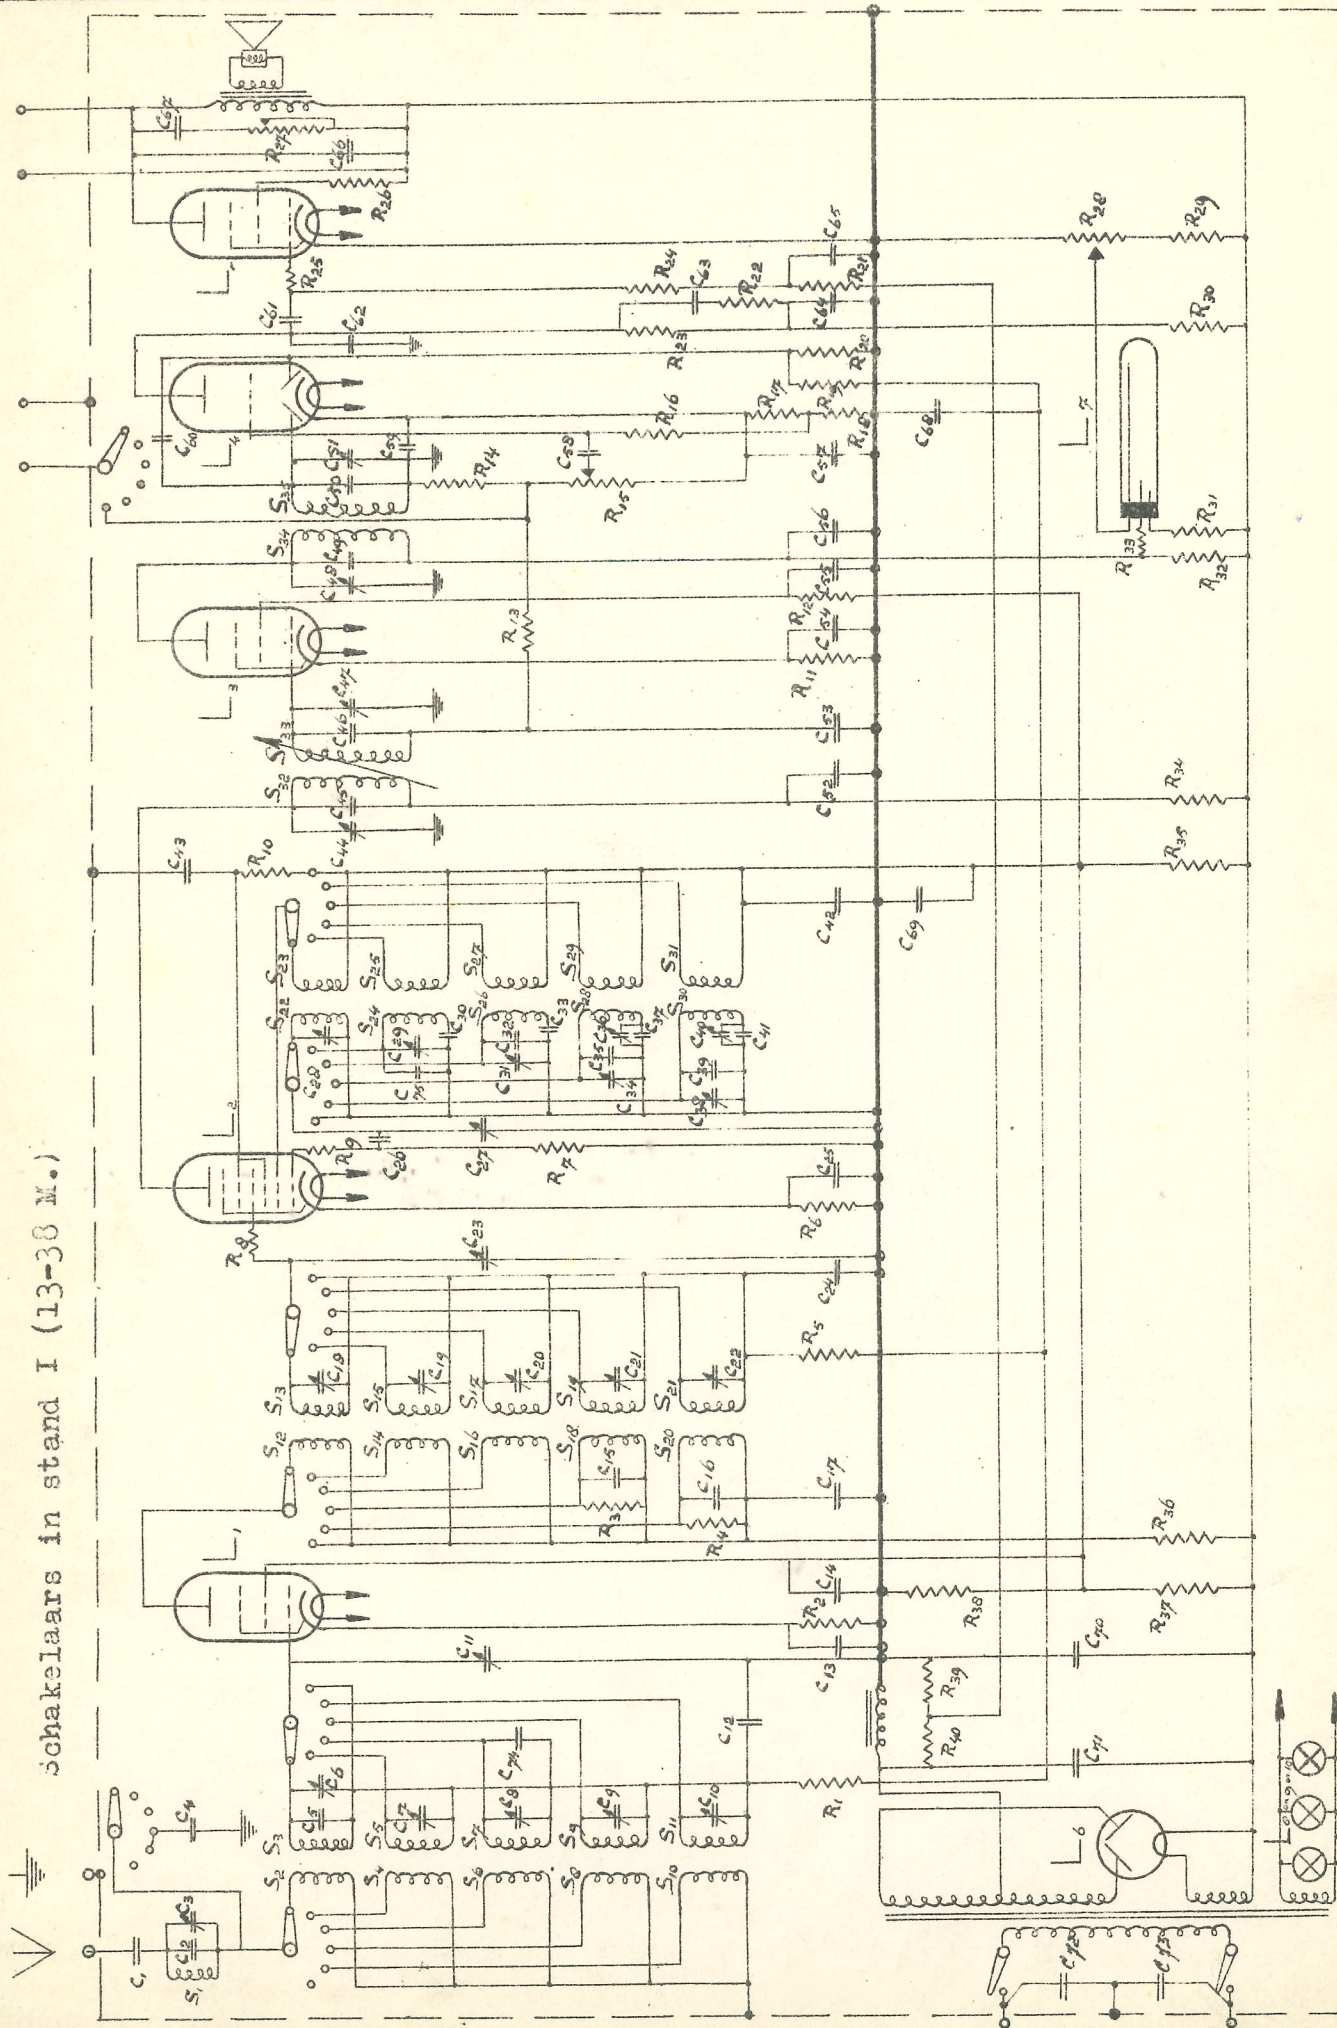



C o n d e n s a t o r e n		
C	Capaciteit	Codenummer
1	10000 μ F	28 198 990
2	80 "	28 192 990
3	27- "	28 210 690
4	80 "	
5	10 "	28 190 030
6	27- "	
7	27- "	
8	27- "	
9	27- "	
10	27- "	
11	490 "	28 211 431
12	50000 "	23 199 080
13	50000 "	
14	50000 "	
15	200 "	28 190 160
16	200 "	
17	50000 "	
18	27- "	
19	27- "	
20	27- "	
21	27- "	
22	27- "	
23	490 "	
24	50000 "	
25	50000 "	
26	500 "	23 193 200
27	490 "	
28	27- "	
29	27- "	
30	2x1550 "	28 193 120
31	27- "	
32	10 "	
33	1550 "	
34	27- "	
35	10 "	
36	27- "	
37	480 "	23 193 160
38	27- "	
39	50 "	
40	27- "	
41	158 "	28 193 100
42	50000 "	
43	50000 "	
44	27- "	
45	80 "	
46	80 "	
47	27- "	
48	27- "	
49	80 "	
50	80 "	
51	27- "	
52	50000 "	
53	25000 "	28 199 030
54	50000 "	
55	50000 "	
56	0,1 μ F	23 199 090
57	25 "	23 180 020
58	10000 μ F	
59	100 "	28 190 130
60	10 "	

C o n d e n s a t o r e n		
C	Capaciteit	Codenummer
61	5000 μ F	
62	500 "	
63	16000 "	28 199 010
64	0,25 "	23 199 130
65	0,25 "	
66	2000 μ F	28 193 920
67	50000 "	
68	50000 "	
69	16 "	23 180 120
70	2x16 "	28 181 400
71	2x16 "	
72	10000 μ F	
73	10000 "	

W e e r s t a n d e n		
R	Weerstand	Codenummer
1	0,2 Ω	28 770 480
2	250 "	190
3	1000 "	250
4	4000 "	310
5	0,2 Ω	480
6	250 "	190
7	50000 "	420
8	20 "	GK 770 410
9	50 "	28 773 570
10	10000 "	28 770 350
11	250 "	190
12	1000 "	250
13	2 Ω	580
14	0,1 "	450
15	0,5 "	28 810 690
16	1 "	28 770 550
17	1000 Ω	250
18	1000 "	250
19	0,5 Ω	520
20	0,5 "	520
21	0,1 "	450
22	20000 Ω	380
23	40000 "	410
24	0,2 Ω	480
25	40000 Ω	410
26	32 "	100
27	50000 "	28 810 040
28	20000 "	28 810 880
29	80000 "	28 771 090
30	32000 "	23 770 400
31	2 Ω	580
32	10000 Ω	23 771 000
33	1000 "	23 770 250
34	4000 "	310
35	5x125000 "	23 771 110
36	1000 "	28 770 250
37	3x50000 "	23 771 070
38	2x50000 "	070
39	32000 "	400
40	0,1 Ω	450

v e r v o l g c o n d e n s a t o r e n		
C	Capaciteit	
74	10 μ F	
75	10 "	

Auteursrecht, volgens de wet voorbehouden.

Gew. 16-1-37
18-1-

Paraaf:



Lampen.		S p o e l e n		
L		S	aantal windingen	Soedenummer
1	AF 3	1	230	GK 561 24
2	AK 2			
3	AF 3	2	35	GK 561 13
4	ABC 1	3	8,75	
5	AL 5			
6	AZ 1	4	50	GK 561 14
7	neon GK 922 021	5	19	
8) 4,5 V. 0,3 A.	6	90	
9		7	45	
10		8	170	GK 561 15
		9	190	
		10	300	
	Luidspreker GK 360 03H	11	360	
	Transformator GK 510 37	12	8,25	GK 561 16
		13	8,25	
		14	12	GK 561 171
		15	19	
		16	15	
		17	45	
		18	190	GK 561 18
		19	179	
		20	660	
		21	362	
		22	9,25	GK 561 191
		23	4,75	
		24	18	GK 561 20
		25	9	
		26	36	
		27	17	
		28	63	GK 561 211
		29	13	
		30	155	
		31	36	
		32	240	GK 561 22
		33	240	
		34	240	GK 561 23
		35	256	