



SPECIFICATION

EBBES


*KY 513 and
KY 5131*

1. 4 + 1 valves superheterodyne designed for direct and alternating current.
2. Valves: UCH 42, UF 41, UBC 41, UL 41, UY 41 (rectifier valve).
3. Wave-ranges:

15,1—	53 m	(19,9—	5,65 Mc)
175 —	585 m	(1720 —	513 kc)
1000 —	2000 m	(300 —	150 kc)
4. Good sensitivity and selectivity on all wave-ranges.
5. Edge-lit perspex dial.
6. 5 inch sensitive moving coil loudspeaker (13 cm).
7. Suitable for 220 V and 110/125 V a.c. and d.c.
8. Mains switch combined with volume control.
9. Negative feedback.
10. Intermediate-frequency rejection filter.
11. Self-contained capacitive aerial.
12. Walnut bakelite cabinet: dimensions 320 x 130 x 200 mms.
12⁵/₈" x 5" x 8"
13. Net weight: 3,2 kgs (7 lbs)
Gross weight (packing included): 4,2 kgs (9 lbs).
Dimensions of packed set 390 x 194 x 250 mms.
15³/₈" x 7⁵/₈" x 9¹³/₁₆"
Cubage: 0,0019 m³ (0,67 cft.)

Model KY 513 can also be supplied as model KY 5131 having the same specification but for the wave-ranges which are:

15,1—	53 m	(19,9—	5,65 Mc)
51 —	181 m	(5,9—	1,655 Mc)
175 —	585 m	(1720 —	513 kc)

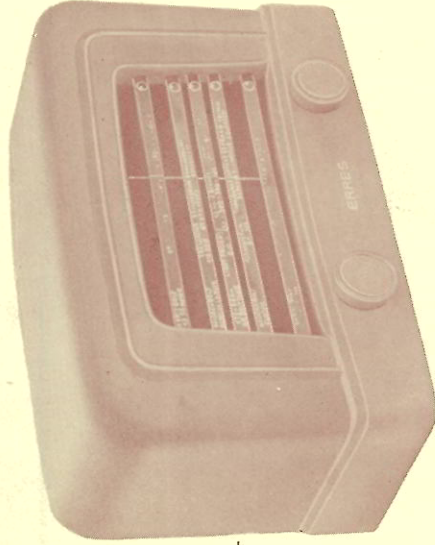

SPECIFICATION

EBBES

*KY 513 and
KY 5131*

1. 4 + 1 valves superheterodyne designed for direct and alternating current.
 2. Valves: UCH 42, UF 41, UBC 41, UL 41, UY 41 (rectifier valve).
 3. Wave-ranges: 15,1 — 53 m (19,9 — 5,65 Mc)
175 — 585 m (1720 — 513 kc)
1000 — 2000 m (300 — 150 kc)
 4. Good sensitivity and selectivity on all wave-ranges.
 5. Edge-lit perspex dial.
 6. 5 inch sensitive moving coil loudspeaker (13 cm).
 7. Suitable for 220 V and 110/125 V a.c. and d.c.
 8. Mains switch combined with volume control.
 9. Negative feedback.
 10. Intermediate-frequency rejection filter.
 11. Self-contained capacitive aerial.
 12. Walnut bakelite cabinet: dimensions 320 x 130 x 200 mms.
12⁵/₈" x 5" x 8"
 13. Net weight: 3,2 kgs (7 lbs)
Gross weight (packing included): 4,2 kgs (9 lbs).
Dimensions of packed set 390 x 194 x 250 mms.
15³/₈" x 7⁵/₈" x 9¹³/₁₆"
Cubage: 0,0019 m³ (0,67 cft.)
- Model KY 513 can also be supplied as model KY 5131 having the same specification but for the wave-ranges which are:
- | |
|-------------------------------|
| 15,1 — 53 m (19,9 — 5,65 Mc) |
| 51 — 181 m (5,9 — 1,655 Mc) |
| 175 — 585 m (1720 — 513 kc) |