



N.V. Radiofabriek en Ingenieursbureau v/h
VAN DER HEEM en BLOEMSMA

Apparaat: **KY 1660**

Onderdeel:

SCHEMA.

No. blad:

Dat: **6-9-'37**


Laatste datum:

Vervangt datum:

Paraaf:

89

Auteursrecht volgens de wet voorbehouden.

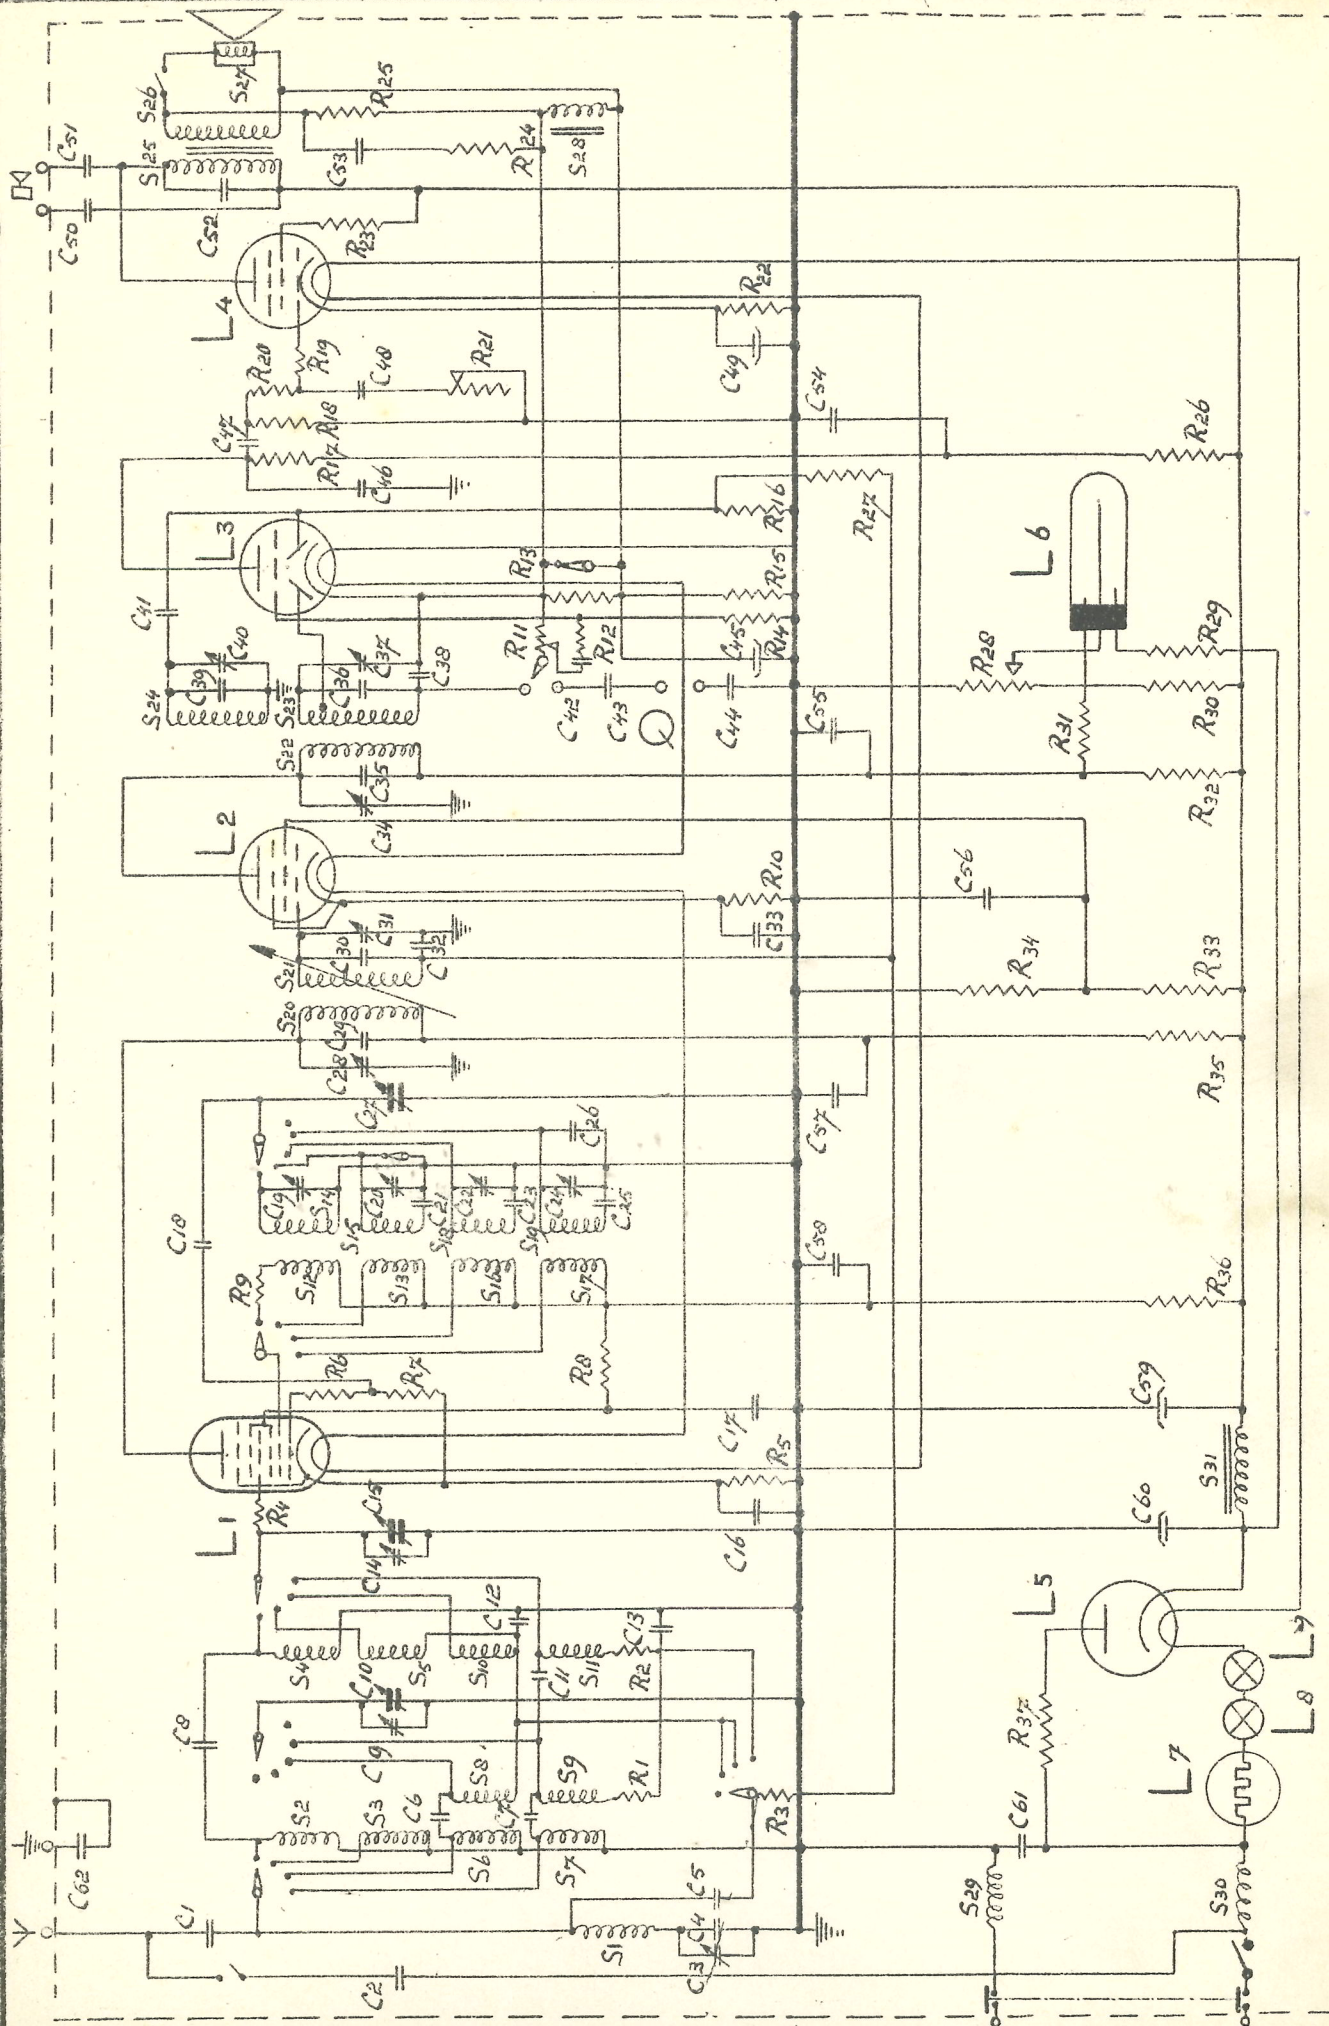



C o n d e n s a t o r e n .

| C | Capaciteit | Codenummer |
|----|------------|------------|
| 1 | 10000 µF | 28 198 990 |
| 2 | 200 " | 28 206 300 |
| 3 | 27 " | 28 210 690 |
| 4 | 80 " | 10211-B |
| 5 | 32 " | 28 206 220 |
| 6 | 10 " | 28 206 340 |
| 7 | 10 " | ker. |
| 8 | 10 " | " |
| 9 | 27 " | " |
| 10 | 490 " | 28 211 421 |
| 11 | 2 " | 28 205 880 |
| 12 | 25000 " | 28 199 030 |
| 13 | 10000 " | " |
| 14 | 27 " | " |
| 15 | 490 " | " |
| 16 | 50000 " | 28 199 060 |
| 17 | 50000 " | " |
| 18 | 200 " | ker. |
| 19 | 27 " | " |
| 20 | 27 " | " |
| 21 | 6400 " | 28 198 970 |
| 22 | 27 " | " |
| 23 | 2010 " | 28 193 010 |
| 24 | 27 " | " |
| 25 | 666 " | 28 195 470 |
| 26 | 20 " | 28 206 370 |
| 27 | 490 " | " |
| 28 | 27 " | " |
| 29 | 80 " | ker. ± 5% |
| 30 | 80 " | " " |
| 31 | 27 " | " |
| 32 | 6400 " | " |
| 33 | 50000 " | " |
| 34 | 27 " | " |
| 35 | 80 " | ker. ± 5% |
| 36 | 80 " | " " |
| 37 | 27 " | " |
| 38 | 80 " | ker. ± 5% |
| 39 | 80 " | " " |
| 40 | 27 " | " |
| 41 | 200 " | ker. |
| 42 | 10000 " | " |
| 43 | 0,1 µF | 28 199 090 |
| 44 | 0,1 " | " |
| 45 | 25 " | 28 182 240 |
| 46 | 80 µF | ker. ± 5% |
| 47 | 25000 " | 28 199 030 |
| 48 | 10000 " | " |
| 49 | 25 µF | electr. |
| 50 | 0,1 " | " |
| 51 | 0,1 " | " |
| 52 | 2000 µF | 28 198 920 |
| 53 | 0,1 µF | " |
| 54 | 0,25 " | 28 199 130 |
| 55 | 50000 µF | 28 199 060 |
| 56 | 50000 " | " |
| 57 | 50000 " | " |
| 58 | 50000 " | " |
| 59 | 32 µF | 28 182 400 |

vervolg condensatoren.

| C | Capaciteit | Codenummer |
|----|------------|------------|
| 60 | 32 µF | 320 v. |
| 61 | 0,1 " | " |
| 62 | 0,25 " | " |

W e e r s t a n d e n .

| R | Weerstand | Watts | Codenummer |
|----|-----------|-------|------------|
| 1 | 32 Ω | 0,25 | 28 773 550 |
| 2 | 32 " | " | 550 |
| 3 | 0,2 MΩ | " | 930 |
| 4 | 50 Ω | " | 570 |
| 5 | 400 " | " | 660 |
| 6 | 50 " | " | 570 |
| 7 | 50000 " | " | 870 |
| 8 | 0,125 MΩ | " | 910 |
| 9 | 200 Ω | " | 630 |
| 10 | 200 " | " | 630 |
| 11 | 0,5 MΩ | log. | 28 810 070 |
| 12 | 1,6 " | 0,5 | 28 770 570 |
| 13 | 32 Ω | 0,25 | 28 773 550 |
| 14 | 1,6 MΩ | 0,5 | 28 770 570 |
| 15 | 2500 Ω | 0,25 | 28 773 740 |
| 16 | 1,6 MΩ | 0,5 | 28 770 570 |
| 17 | 0,1 " | 0,25 | 28 773 900 |
| 18 | 0,8 " | " | 990 |
| 19 | 1000 Ω | " | 700 |
| 20 | 0,1 MΩ | " | 900 |
| 21 | 2,5 " | log. | 28 810 560 |
| 22 | 160 Ω | 0,5 | 28 770 170 |
| 23 | 32 " | 0,25 | 28 773 550 |
| 24 | 20 " | " | 530 |
| 25 | 200 " | " | 630 |
| 26 | 32000 " | " | 850 |
| 27 | 3,2 MΩ | 1 W | 28 771 250 |
| 28 | 20000 Ω | lin. | 28 810 880 |
| 29 | 5 MΩ | 1 W | 28 771 270 |
| 30 | 80000 Ω | 1 W | 28 771 090 |
| 31 | 10000 " | 0,25 | 28 773 800 |
| 32 | 5000 " | 0,5 | 28 770 320 |
| 33 | 2x50000 " | 1 W | 28 771 070 |
| 34 | 20000 " | 1 W | 030 |
| 35 | 1000 " | 0,25 | 28 773 700 |
| 36 | 1000 " | " | 700 |
| 37 | 2x250 " | 1 W | 28 770 840 |

L A L P E N .

- 1 1 = EK 2
- 2 = EF 5
- 3 = EEC 3
- 4 = CL 4
- 5 = CY 1
- 6 = 4662
- 7 = C 1

Auteursrecht volgens de wet. voorbehouden.

Laatste datum:

Vervangt datum:

Paraaf:



N.V. Radiofabriek en Ingenieursbureau v/h
VAN DER HEEM en BLOEMSMA

Apparaat: **KY 166 U**
 vervolg
 Onderdeel: **WAARDELIJST**

SCHEMA.

No. blad;

Dat: 9-10-'37

S p o e l e n .

| <u>S</u> | <u>aantal</u> <u>windingen</u> | <u>Codenummer.</u> |
|----------|-----------------------------------|--------------------|
| 1 | 930 | GK 561 050 |
| 2 | 40 | } |
| 3 | 90 | |
| 4 | 10 | |
| 5 | 45 | |
| 6 | 240 | } |
| 7 | 800 | |
| 8 | 180 | |
| 9 | 360 | |
| 10 | 176 | } |
| 11 | 360 | |
| 12 | 7 | } |
| 13 | 18 | |
| 14 | 10 | |
| 15 | 38 | |
| 16 | 23 | } |
| 17 | 90 | |
| 18 | 86 | |
| 19 | 251 | |
| 20 | 1140 | } |
| 21 | 1140 | |
| 22 | 1120 | } |
| 23 | 770+387 | |
| 24 | 1157 | |
| 25 | 4000 | } |
| 26 | 146 | |
| 27 | luidspreker systeem | 9602 |
| 28 | 420 | 28 546 212 |
| 29 | 200 | } |
| 30 | 200 | |
| 31 | 3300 | GK 550 070 |

Auteursrecht volgens de wet voorbehoudend

Laatste datum:

Vervangt datum:

Paraaf:

© van der Heem & Bloemsma documentatie centrum @
 www.vanderheem.com erres.eu vcheem@planet.nl